

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 146 474 A1**

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art. 158(3) EPC

(43) Date of publication:
17.10.2001 Bulletin 2001/42

(51) Int Cl.7: **G06K 17/00**, H01R 13/629,
H01R 24/12

(21) Application number: **00971781.0**

(86) International application number:
PCT/JP00/07762

(22) Date of filing: **02.11.2000**

(87) International publication number:
WO 01/35333 (17.05.2001 Gazette 2001/20)

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

(30) Priority: **05.11.1999 JP 31611099**
12.11.1999 JP 32318799

(71) Applicants:
• **Yamaichi Electronics Co., Ltd.**
Ohta-ku, Tokyo 143-8515 (JP)
• **MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.**
Kadoma-shi, Osaka 571-8501 (JP)

(72) Inventors:
• **ITO, Toshiyasu**
Togane-shi, Chiba 283-0811 (JP)

• **OYA, Masaaki**
Yokohama-shi, Kanagawa 230-0077 (JP)
• **TAGUTI, Kazutaka**
Asaka-shi, Saitama 351-0011 (JP)
• **TORII, Takashi**
Osaka-shi, Osaka 536-0008 (JP)
• **KAWAI, Hideki**
Nara-shi, Nara 631-0801 (JP)

(74) Representative: **Weber, Joachim, Dr.**
Hoefer, Schmitz, Weber & Partner
Patentanwälte
Gabriel-Max-Strasse 29
81545 München (DE)

(54) **CARD CONNECTOR**

(57) The connector housing 30 is formed with a pair of guide grooves 50a, 50b and a pair of side walls 60. The guide grooves 50a, 50b support the both side edges of the upper body portion 21 of the thick first card 20 and also the both side edges of the card body 11 of the thin second card 10 and guide these cards as they are inserted or extracted. The side walls 60 define, below a space between the paired guide grooves 50a, 50b, a space in which to accommodate the lower body portion 23 of the first card 20. This construction ensures that, whichever of the first and second cards is inserted, the elastic displacements of the contact terminals 40 of a card connector 1 remain the same, allowing the card to be electrically connected stably.

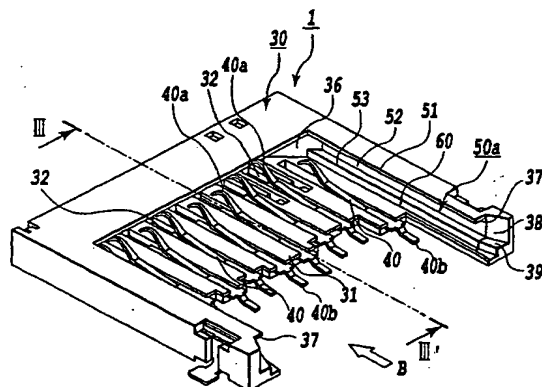


FIG.1

Description

TECHNICAL FIELD

[0001] The present invention relates to a card connector structure mounted on electronic devices, such as cellular phones, telephones, PDAs (personal digital assistants), portable audio devices and digital cameras, and more specifically to a card connector into which two kinds of cards with different thicknesses can suitably be inserted. The present invention also relates to a card connector capable of preventing the card from falling from the card connector when it is ejected.

BACKGROUND ART

[0002] In electronic devices such as cellular phones, telephones, PDAs and digital cameras, a variety of functions are added by inserting an IC card with a built-in memory or control IC, such as a SIM (subscriber identity module) card, an MMC (multimedia card), a Smart Media (trademark), an SD (super density or secure digital) card and a Memory Stick (trademark).

[0003] As the number of kinds of IC cards has increased in recent years, a variety of standards as to the card thickness have come into use.

[0004] Of these IC cards, the MMC card for example has an external view as shown in Fig. 16 and Fig. 17A, 17B.

[0005] As shown in Fig. 16 and Fig. 17A, 17B, the MMC card 10 has a card body 11 with a predetermined thickness a , which has a virtually triangular cut-off corner portion 12 at its front right corner to prevent its erroneous insertion. On the front side of the bottom surface of the card body 11 there are a plurality of contact pads 13 connected to an IC circuit inside the card.

[0006] The SD card 20 with a larger thickness b than the MMC card 10 has a construction as shown in Fig. 18 and Fig. 19A, 19B and 19C.

[0007] As shown in Fig. 18 and Fig. 19A, 19B, 19C, the SD card 20 has an upper body portion 21 with virtually the same thickness a as the card body 11 of the MMC card 10. On the back surface of the upper body portion 21 is formed a lower body portion 23 with a predetermined thickness which has a slightly narrower width than the upper body portion 21. That is, the SD card 20 has formed along both card side edges step portions 27 that are defined by the bottom surfaces of the upper body portion 21 and the lower body portion 23. The thickness b of SD card 20 is thicker than the thickness a of the MMC card 10. The upper body portion 21 and the lower body portion 23 have a cut-off corner portion 22 at their front right corner to prevent erroneous insertion.

[0008] On the front side of the lower body portion 23 a plurality of recessed portions 24 are formed, separated from each other by a plurality of partition walls 29. In these recessed portions 24 are arranged contact pads

25 connected to an IC circuit inside the card. The depth of each recessed portion 24 is almost equal to the height of the lower body portion 23 and therefore the surface of each contact pad 25 is spaced from the front surface of the upper body portion 21 by a distance equal to the thickness a of the upper body portion 21.

[0009] The connector for removably receiving such an IC card has a plurality of contact terminals made from metal leaf springs in a connector housing. The inserted IC card is electrically connected to the electronic device, on which the connector is mounted, by these contact terminals coming into contact with the contact pads formed on the front or back surface of the inserted IC card. The contact pads of the IC card include a plurality of power supply terminals connected to power supply lines and a plurality of signal terminals for transmitting/receiving of various signals. They are connected through the contact terminals of the card connector to power supply circuits and various signal processing circuits on the electronic device.

[0010] When considering a connector shared for receiving two kinds of IC cards with different thicknesses measured from the card surface to the card bottom surface, in this connector structure, each of these different cards is generally supported at its bottom surface by the connector housing.

[0011] In the connector housing structure that supports the bottom surface of each of these cards, however, because the cards have different thicknesses, when these cards are inserted, the distances from the contact pads of each card to the contact terminals of the connector differ.

[0012] Hence, if the elastic force (contact pressure) of the contact terminals is set to conform to a thicker card, a required contact pressure cannot be given to the contact terminals when a thinner card is inserted.

[0013] Conversely, if the contact pressure of the contact terminals is set to conform to a thinner card, when a thick card is inserted, the contact terminals deflect excessively beyond the stress limit, resulting in plastic deformations of the contact pieces.

[0014] The card connectors of this type are often equipped with an eject mechanism for extracting the card from the connector.

[0015] In this eject mechanism, an elastically displaceable braking piece is pressed against the card to produce a friction force acting in a direction opposite to in which the card is ejected, in order to prevent the card from being pushed out rapidly and falling from the connector.

[0016] When considering providing a card rapid ejection prevention braking piece in a common connector that can receive two kinds of IC cards with different thicknesses, it is common practice to arrange the braking piece in said common connector so that it engages the bottom surface of each card.

[0017] However, with the braking piece arranged to engage the bottom surface of each card, when a card

with a different thickness is inserted as described above, the distance from the card bottom surface to the support surface that rigidly supports the braking piece changes.

[0018] Hence, if the elastic displacement (contact pressure) of the braking piece is set to produce an appropriate friction force for the thick card, the contact pressure and the resulting frictional force are too small for the thin card, making it impossible to provide the card with an appropriate friction force.

[0019] Conversely, if the elastic displacement (contact pressure) of the braking piece is set to produce an appropriate friction force for the thin card, the insertion of a thick card causes the braking piece to deflect excessively beyond the stress limit, resulting in the braking piece being plastically deformed.

[0020] The present invention has been accomplished under these circumstances and it is an object of the present invention to solve the above-described problems by providing a card connector which can receive two kinds of cards with different thicknesses with the same contact pressures while securing a sufficient reliability of contact between the contact pads and the contact terminals.

[0021] Further, it is another object of the present invention to solve the above-described problems by providing a card connector which can apply appropriate braking forces to two kinds of cards with different thicknesses and thereby reliably prevent an uncontrolled rapid card ejection.

DISCLOSURE OF THE INVENTION

[0022] Viewed from a first aspect the present invention provides a card connector for holding either of first and second cards in a connector housing so that contact pads of the card engage contact terminals arranged in the connector housing, wherein the first card has an upper body portion, a lower body portion formed slightly narrower than the upper body portion and having recessed portions in a front side area thereof, contact pads provided in said recessed portions, and stepped portions formed along both side edges of the card by a bottom surface of said upper body portion and a bottom surface of said lower body portion, and the second card has a card body portion having almost the same horizontal shape and thickness as the upper body portion of said first card, and contact pads arranged on a bottom surface of the card body portion at almost the same horizontal positions as the contact pads of said first card,

the card connector comprising: a pair of guide grooves formed in both side walls of the connector housing to support the side edges of the upper body portion of said first card and the side edges of the card body portion of said second card and thereby guide said first or second card as it is inserted or extracted; and side walls to define, below a space between the pair of the guide grooves, a space in which to accommodate the lower body portion of said first card.

[0023] In the case of the thin second card, the side edges of the card body portion are supported by the paired guide grooves formed in the connector housing.

[0024] In the case of the thick first card, the side edges of the upper body portion of almost the same thickness as the card body portion of the second card, i.e., the stepped portions, are supported by the paired guide grooves. Then, the lower body portion of the first card protruding downwardly from the upper body portion through the stepped portions is accommodated in a space below a space formed between the guide grooves.

[0025] As described above, because, whichever of the first and second cards is inserted, the card is supported in the connector in such a way that the distance from the contact pads of the first card to the contact terminals of the connector is equal to the distance from the contact pads of the second card to the contact terminals, the elastic displacement (contact pressure) of the contact terminals remains the same, whichever card is inserted. This ensures a stable contact reliability for both of the cards.

[0026] A second aspect of the invention provides a card connector according to the first aspect, which further comprises: an eject mechanism to eject said card; and an elastic braking piece arranged at such a position that it engages the bottom surface of the upper body portion of said first card when said first card is inserted and engages the bottom surface of the card body portion of said second card when said second card is inserted, the braking piece applying a braking force to said first or second card when it is ejected.

[0027] In the second aspect of the invention, the elastic braking piece to apply the braking force to either of said first and second cards during the card ejection engages the bottom surface of the upper body portion of said first card, i.e., the upper side of the stepped portion, when said first card is inserted and engages the bottom surface of the card body portion of said second card when said second card is inserted.

[0028] Thus, with this invention, because the elastic braking piece is pressed against the equal-thickness portions of the first and second cards with different thicknesses, the displacement or contact pressure of the elastic braking piece remains the same, whichever of the first and second cards is inserted. Hence, the frictional resistance of the braking piece applied to the card when the card is ejected remains the same for the first and second cards, thus preventing both of these cards from rapidly coming out and falling from the connector, realizing a stable ejection operation.

[0029] In another aspect of the invention, the housing top plate forming the upper walls of the guide grooves is formed with an opening having a width larger than that of the lower body portion of the first card or with a recess that recedes in the height direction.

[0030] Hence, if the first card is erroneously inserted upside down, the lower body portion of the first card can

escape upward through the opening or recess, making it possible to give the braking piece the same displacement as during the normal insertion and thereby prevent the braking piece from being deformed or displaced in excess of its stress limit.

[0031] In a further aspect of the invention, because the elastic braking piece is pressed against the equal-thickness portions of the first and second cards with different thicknesses, the same braking force can be applied to the first and second cards with different thicknesses in the card retraction direction during the card insertion process. Hence, either of the cards can be held stably and reliably, preventing the card from falling out from the connector due to unexpected external forces.

BRIEF DESCRIPTION OF THE DRAWINGS

[0032] Fig. 1 is a perspective view showing an overall construction of a card connector according to a first embodiment of the invention.

[0033] Fig. 2 is a horizontal cross section showing the card connector according to the first embodiment of the invention.

[0034] Fig. 3 is a vertical cross section, taken along the line III-III of Fig. 1, of the card connector according to the first embodiment of the invention.

[0035] Fig. 4 is a front view of the card connector according to the first embodiment of the invention.

[0036] Fig. 5 is a vertical cross section similar to Fig. 3 showing the card connector according to the first embodiment of the invention with a thin card inserted.

[0037] Fig. 6 is a vertical cross section similar to Fig. 3 showing the card connector according to the first embodiment of the invention with a double-height thick card inserted.

[0038] Fig. 7 is a perspective view showing the card connector according to the first embodiment of the invention with a double-height thick card inserted.

[0039] Fig. 8 is a plan view showing a card connector according to a second embodiment of the invention.

[0040] Fig. 9 is a front view showing the card connector according to the second embodiment of the invention.

[0041] Fig. 10 is a partially cutaway plan view showing the card connector according to the second embodiment of the invention.

[0042] Fig. 11 is a cross section showing the card connector according to the second embodiment of the invention before the card is inserted.

[0043] Fig. 12 is a cross section showing the card connector according to the second embodiment of the invention when the thin card is inserted.

[0044] Fig. 13 is a cross section showing the card connector according to the second embodiment of the invention when the double-height thick card is inserted.

[0045] Fig. 14 is a front view showing the card connector according to the second embodiment of the invention when the double-height thick card is inserted.

[0046] Fig. 15A and Fig. 15B are a front view and a vertical cross section, respectively, showing a card connector according to another embodiment of the invention.

5 [0047] Fig. 16 is a perspective view showing a thin card applied to the present invention.

[0048] Fig. 17A and Fig. 17B are a plan view and a front view, respectively, showing a thin card of Fig. 16.

10 [0049] Fig. 18 is a perspective view showing a double-height thick card applied to the present invention.

[0050] Figs. 19A, 19B and 19C are a plan view, a front view and a side view, respectively, showing a double-height thick card of Fig. 18.

15 BEST MODE FOR CARRYING OUT THE INVENTION

[0051] Now, embodiments of this invention will be described in detail by referring to the accompanying drawings.

20

[First Embodiment]

[0052] Fig. 1 is a perspective view showing a card connector according to the first embodiment of this invention. Fig. 2 is a horizontal cross section of the card connector. Fig. 3 is a cross section taken along the line III-III of Fig. 1. Fig. 4 is a front view of the card connector as seen from the direction of arrow B in Fig. 1.

25 [0053] The card connector 1 is mounted on an electronic device, such as cellular phone, PDA, portable audio device and camera.

[0054] The connector 1 shown in Fig. 1 to Fig. 4 can accommodate both a thin card 10 such as an MMC card shown in Fig. 16 and Fig. 17 and a double-height thick card 20 with step portions such as an SD card shown in Fig. 18 and Fig. 19.

30 [0055] In Fig. 1 to Fig. 4, the card connector 1 has a connector housing 30 roughly U-shaped when viewed from above and which is made from an insulating material such as resin and formed in one piece having side leg portions.

35 [0056] A base plate 31 of the connector housing 30 is formed with a plurality of press-fit grooves 32 in which a plurality of contact terminals 40 made from leaf springs are positioned and fitted under pressure. These contact terminals 40 include power supply terminals and signal terminals. Each of the contact terminals 40 has a base portion supported in the press-fit groove 32 and an elastic deformation portion extending like a cantilever beam from the base portion to above the base plate 31. The elastic deformation portion has a contact portion 40a projecting in an arc at its front end side which contacts under pressure the associated one of a plurality of contact pads 13, 25 of the card 10, 20. A terminal portion 40b formed on the base end side of each base portion is soldered to the associated one of contact pads on a printed circuit board of the electronic device.

40 [0057] Each of the IC cards 10, 20 is inserted into the

connector 1 through a card insertion opening 33 formed at the front of the housing 30.

[0058] The connector housing 30 has an abutment wall 35 (Fig. 3) that combines the side leg portions and against which the front end of the inserted IC card 10, 20 is made to abut. At one corner where the abutment wall 35 and one of the side leg portions intersect, a corner wall 36 is formed which the cut-off corner portion 12, 22 of the inserted IC card 10, 20 engages.

[0059] The IC card 10, 20 is guided being supported its side edge portions by a pair of guide grooves 50a, 50b formed in inner side walls of the side leg portions of the housing 30 as it is inserted or retracted.

[0060] One of the guide grooves 50a extends from the card insertion opening 33 to the corner wall 36 and the other guide groove 50b extends from the card insertion opening 33 to the abutment wall 35. These guide grooves 50a, 50b are each formed by an upper wall 51, a side wall 52 and a lower wall 53 so that their opened portions face each other.

[0061] At the inlet portions of the guide grooves 50a, 50b the upper wall 51 is formed with a notch 37 and the side wall 52 and lower wall 53 are formed with tapered surfaces 38, 39, respectively, to facilitate the insertion of the card 10, 20.

[0062] From the edge of the lower wall 53 of each guide groove 50a, 50b a second side wall 60 extends vertically downwardly almost at right angles to the lower wall 53. For each of the second side walls 60 a second lower wall is formed, and the upper surface of the second lower wall is flush with the upper surface of the base plate 31. Between the two parallel second side walls 60 there is formed a space 61.

[0063] Fig. 5 shows the connector 1 with the thin card 10 inserted therein. When the thin card 10 is inserted into the connector 1, the side surfaces of the card body 11 are guided by the side walls 52 of the guide grooves 50a, 50b and the side edge portions of the bottom surface of the card body 11 are guided being supported by the lower walls 53. Further, the floating of the card 10 due to the elastic force of the contact terminals 40 of the connector 1 is prevented by the side edge portions of the top surface of the card body 11 being restricted by the upper walls 51 of the guide grooves 50a, 50b.

[0064] Fig. 6 and Fig. 7 show the connector 1 with the double-height thick card 20 inserted therein.

[0065] When the double-height thick card 20 is inserted into the connector 1, the side surfaces of the upper body portion 21 are guided by the side walls 52 of the guide grooves 50a, 50b and the side edge portions of the bottom surface of the upper body portion 21, i.e., the step portions 27, are supported on the lower walls 53. Further, the floating of the card 20 due to the elastic force of the contact terminals 40 is prevented by the side edge portions of the top surface of the upper body portion 21 being restricted by the upper walls 51, as in the case with the thin card 10.

[0066] Further, the lower body portion 23 of the dou-

ble-height thick card 20 is accommodated in the space 61 between the second side walls 60. That is, the side surfaces of the lower body portion 23 of the double-height thick card 20 are guided by the second side walls 60.

[0067] In the thin card 10, as shown in Fig. 16 and Fig. 17, the contact pads 13 are on the bottom surface of the card body 11.

[0068] In the double-height thick card 20, on the other hand, the contact pads 25 as shown in Fig. 18 and Fig. 19 are on the bottom surface of the upper body portion 21, i.e., in the recessed portions 24 formed in the lower body portion 23.

[0069] The connector structure described above supports the inserted card in the direction of height as follows. The thin card 10 is supported at its bottom surface by the lower walls 53 of the guide grooves 50a, 50b, and the double-height thick card 20 is supported at the bottom surface of its upper body portion 21 similarly by the lower walls 53 of the guide grooves 50a, 50b.

[0070] In this connector structure, therefore, whichever of the cards 10 and 20 is inserted, the distance from the contact pads 13 or 25 to the contact terminals 40 of the connector remains unchanged, so that the contact terminals are given the same elastic displacement, whichever card 10 or 20 is inserted. Hence, the both cards 10, 20 are given almost the same contact pressures and therefore stable contact reliability.

[0071] In the connector structure above, the positioning in the lateral direction of the double-height thick card 20 with respect to the connector 1 can be realized either by the side walls 52, which form the guide grooves 50a, 50b, or by the second side walls 60 below. When a dimensional difference between the horizontal shapes of the thin card 10 and the upper body portion 21 of the double-height thick card 20 is small, the lateral positioning of the double-height thick card 20 may be done by the upper side walls 52. When the dimensional difference is large, the lateral positioning of the double-height thick card 20 may be done by the lower second side walls 60.

[Second Embodiment]

[0072] Next, the second embodiment of the present invention will be described by referring to Fig. 8 to Fig. 14.

[0073] Fig. 8 is a plan view showing a card connector according to the second embodiment of this invention. Fig. 9 is a front view of the card connector as seen from a direction of arrow B in Fig. 8. Fig. 10 is a partly cutaway plan view of the card connector.

[0074] The connector 1 shown in Fig. 8 to Fig. 10 can accommodate both a thin card 10 such as an MMC shown in Fig. 16 and Fig. 17 and a double-height thick card 20 with step portions such as an SD card shown in Fig. 18 and Fig. 19. Components with the same functions as those of the first embodiment are assigned like

reference numbers to facilitate the understanding of the second embodiment.

[0075] In Fig. 8 to Fig. 10, a base plate 31 of the connector housing 30 is formed with a plurality of press-fit grooves 32 in which a plurality of contact terminals 40 made from contact leaf springs are fitted under pressure. The contact terminals 40 are each supported like a cantilevered beam and have a contact portion 40a projecting at the front end side thereof so that the contact portions 40a come into pressure contact with a plurality of contact pads 13, 25 of the card 10, 20. Terminal portions 40b formed on the base end side of the contact terminals 40 are soldered to contact pads of a printed circuit board of an electronic device.

[0076] These contact terminals 40 make electrical connection between the card 10, 20 and the electronic device and at the same time provide an appropriate card holding force by their elastic force when the card is inserted.

[0077] The IC card 10, 20 is inserted into the connector 1 through a card insertion opening 33 formed at the front of the housing 30.

[0078] The connector housing 30 is formed with an abutment wall 35 which the inserted IC card 10, 20 engages. At one corner of the abutment wall 35 there is formed a protruding corner wall 36 which the cut-off corner portion 12, 22 of the IC card 10, 20 engages.

[0079] In one side portion of the connector housing 30 a lever holding portion 3 is formed outside the guide groove 50a to slidably guide an eject lever 2 between an initial position and an eject position in the direction of card insertion and extraction. The lever holding portion 3 encloses the eject lever 2 in three or four directions.

[0080] In the housing 30 on the far side of the abutment wall 35 there is a cam lever accommodating portion 5 in which a cam lever 4 is installed. The cam lever 4 is mounted to be rotatable about a shaft 6 in a plane parallel to the surface of the base plate 31 of the housing 30. One end of the cam lever 4 can engage a front end 2a of the eject lever 2 and the other end can engage the front end wall of the card 10 or 20.

[0081] The eject lever 2 and cam lever 4 form an eject mechanism for ejecting the card 10, 20.

[0082] When the card 10, 20 is inserted into the connector 1, the front end wall of the card 10, 20 pushes one end of the cam lever 4 which is then rotated to a position indicated by a dashed line in Fig. 8. This causes the other end of the cam lever 4 to push the front end 2a of the eject lever 2, retracting the eject lever 2.

[0083] When, with the card inserted, the eject lever 2 is pushed forwardly, the front end 2a of the eject lever 2 presses one end of the cam lever 4, rotating the cam lever 4 to a position indicated by a two-dot chain line in Fig. 8. As a result of this rotation, the other end of the cam lever 4 pushes the front end wall of the card 10, 20, causing the card to be ejected.

[0084] The IC card 10, 20 is guided being supported

its side edges portion by a pair of guide grooves 50a, 50b formed in inner side walls of the housing 30 as it is inserted or extracted.

[0085] One of the guide grooves 50a extends from the card insertion opening 33 to the corner wall 36 and the other guide groove 50b extends from the card insertion opening 33 to the abutment wall 35.

[0086] These guide grooves 50a, 50b are each formed by an upper wall 51, a side wall 52 and a lower wall 53. From the edge of the lower wall 53 of each guide groove 50a, 50b a second side wall 60 extends downwardly.

[0087] Further, as shown in Fig. 10 and Fig. 11, a braking piece 7 made from an elastic leaf spring is installed in a part of the guide groove 50a on the far side thereof. The braking piece 7 applies a braking force to the card 10, 20 as the card is ejected.

[0088] The braking piece 7 has a stationary portion 7a secured to a braking piece support surface 70, a leaf spring portion 7b extending in the direction of card insertion and extraction, and a front engagement portion 7c projecting in an arc to engage the bottom surface of the card 10, 20. With the stationary portion 7a rigidly fixed, the braking piece 7 is supported like a cantilevered beam. Below the front engagement portion 7c of the braking piece 7, the housing 30 has an opening 71 to allow the front engagement portion 7c to escape downwardly. To apply the braking force to the card 10, 20 effectively as it is ejected, the far side of the braking piece 7 is rigidly secured and the front end is set free.

[0089] The braking piece support surface 70, to which the braking piece 7 is secured, is formed at a position a predetermined distance lower than the lower wall 53 of the guide groove 50a so that when the braking piece 7 is elastically deformed by the pressing force of the card, the braking piece 7 can secure a predetermined projection height. The width of the leaf spring portion 7b and the front engagement portion 7c of the braking piece 7 is set almost equal to the width of the bottom surface of the edge portion of the upper body portion 21 of the double-height thick card 20, i.e., the width of the step portion 27.

[0090] Fig. 12 shows the state of the connector 1 with the thin card 10 inserted therein.

[0091] When the thin card 10 is inserted into the connector 1, the side surfaces of the card body 11 are guided by the side walls 52 of the guide grooves 50a, 50b and the side edge portions of the bottom surface of the card body 11 are supported by the lower walls 53. Further, the side edge portions of the top surface of the card body 11 are restricted by the upper walls 51 to prevent the card 10 from being floated by the elastic force of the contact terminals 40 of the connector 1.

[0092] Further, when the thin card 10 is inserted, the front engagement portion 7c of the braking piece 7 is pressed down by the side edge portion of the bottom surface of the card 10, elastically deforming the braking piece 7 downward. Hence, with the card 10 inserted, the

pressing load of the braking piece 7 is applied to the bottom surface of the card 10, so that when the card is ejected by the eject mechanism, the card can be applied a braking force.

[0093] Fig. 13 and Fig. 14 show the state of the connector 1 when the double-height thick card 20 is inserted.

[0094] When the double-height thick card 20 is inserted into the connector 1, the side surfaces of the upper body portion 21 of the card 20 are guided by the side walls 52 of the guide grooves 50a, 50b and the side edge portions of the bottom surface of the upper body portion 21, i.e., the step portions 27, are supported by the lower walls 53. Further, the side edge portions of the top surface of the upper body portion 21 are restricted by the upper walls 51 to prevent the card 20 from being floated by the elastic force of the contact terminals 40. The lower body portion 23 of the double-height thick card 20 is accommodated in the housing space between the second side walls 60.

[0095] Further, when the double-height thick card 20 is inserted, the front engagement portion 7c of the braking piece 7 is pressed down by the side edge portion of the bottom surface of the upper body portion 21 of the card 20, i.e., by the step portion 27, elastically deforming the braking piece 7 downwardly. Hence, with the card 20 inserted, the pressing load of the braking piece 7 is applied to the step portion 27 of the card 20 so that when the card 20 is ejected, an appropriate braking force can be applied to the card.

[0096] In the connector structure above, because the braking piece 7 is so arranged that it presses, from below, against equal-thickness portions of the two different-thickness cards 10, 20, the braking piece 7 is displaced by the same distance, whichever of the two cards 10, 20 is inserted. This means that the contact pressures produced by the braking piece 7 engaging the card 10 and the card 20 are virtually equal. Therefore, when the card is ejected by the eject mechanism, the frictional resistances applied by the elastic force of the braking piece 7 to the two cards 10, 20 are equal, thus assuring stable ejection operations for the two cards. Further, the braking piece 7 also functions as a braking means to prevent the card from falling from the connector due to unexpected external forces when the card is being inserted. The braking piece 7 can therefore ensure more stable holding of the card.

[Another Embodiment]

[0097] Fig. 15A and Fig. 15B show another embodiment of this invention. In this embodiment an opening width W1 of a top plate 55 forming the upper walls 51 of the guide grooves 50a, 50b of the connector housing 30 is set larger than a width W2 of the bottom surface of the lower body portion 23 of the double-height thick card 20 and smaller than a width W3 of the upper body portion 21 (see Fig. 15A and Fig. 15B; Figs. 15A and 15B

show the state in which the double-height thick card 20 is inserted upside down).

[0098] Hence, in this construction, if the double-height thick card 20 is erroneously inserted upside down, the upper body portion 21 is guided by the guide grooves 50a, 50b with the lower body portion 23 of the double-height thick card 20 received in the opening of the width W1 formed in the top plate 55. As a result, the elastic displacement of the braking piece 7 when the double-height thick card 20 is erroneously inserted upside down and the elastic displacement when the card is inserted normally are equal. Hence, even when the double-height thick card 20 is wrongly inserted, the braking piece 7 is not displaced in excess of its stress limit and can reliably be protected against being plastically deformed.

[0099] Although, in the embodiments described above, the braking piece 7 of the present invention is applied the card connector having an eject mechanism, the braking piece 7 of this invention may also be applied to card connectors with no eject mechanism. That is, in this kind of connectors the falling of the card is prevented basically by the pressing force of a plurality of contact terminals 40. For a more reliable and stable holding of the card, the card connector with no eject mechanism may be provided with the braking piece 7 which is used to apply the braking force to the card in the card extraction direction during the process of card insertion.

[0100] While in the above embodiments the top plate 55 of the connector housing 30 covers only the guide grooves 50a, 50b, the abutment wall 35 and their vicinities, the top plate 55 may cover the entire surface or almost all of the surface of the card. In that case, to accommodate the lower body portion 23 of the double-height thick card 20 (allow it to escape upward) when the card 20 is wrongly inserted upside down, the top plate 55 needs to be formed with a recess that recedes in the height direction.

[0101] Further, the connector housing may be constructed of a plurality of housing members, such as an upper metal housing made by sheet metal working and a lower housing formed of resin.

[0102] Further, where the connector is mounted upside down on a printed circuit board, the printed circuit board may be used to serve as the top plate of the connector.

[0103] Further, the embodiments described above take an SD card as an example of the double-height thick card 20 and an MMC card as an example of the thin card, but the present invention can be applied to any other kind of IC card.

INDUSTRIAL APPLICABILITY

[0104] With this invention, because the card is supported in the connector in such a manner that no matter which of the two cards with different thicknesses is inserted, the distance from the contact pads of the card

to the contact terminals of the connector remains the same, the contact terminals are given the same elastic displacements by whichever card is inserted. Hence, the both cards can secure stable contact reliability.

[0105] Because the elastic braking piece is pressed against the equal-thickness portions of the first and second cards with different thicknesses, the displacement of the elastic braking piece remains the same, whichever of the first and second cards is inserted. Hence, the frictional resistance of the braking piece applied to the card when the card is ejected remains the same for the first and second cards, thus preventing both of these cards from rapidly coming out and falling from the connector, realizing a stable ejection operation.

[0106] Further, in this invention, if the double-height thick card is erroneously inserted upside down, the lower body portion of the double-height thick card can escape upward through the opening or recess formed in the housing top plate, making it possible to give the braking piece the same elastic displacement as during the normal insertion and thereby prevent the braking piece from being deformed or displaced in excess of its stress limit.

[0107] Further, in this invention, because the elastic braking piece applies a braking force to the card in the card extraction direction when the card is inserted, the card can be held stably and reliably, preventing the card from falling out from the connector due to unexpected external forces.

Claims

1. A card connector for holding either of first and second cards in a connector housing so that contact pads of the card engage contact terminals arranged in the connector housing,

wherein the first card has an upper body portion, a lower body portion formed slightly narrower than the upper body portion and having recessed portions in a front side area thereof, contact pads provided in said recessed portions, and stepped portions formed along both side edges of the card by a bottom surface of said upper body portion and a bottom surface of said lower body portion, and the second card has a card body portion having almost the same horizontal shape and thickness as the upper body portion of the first card, and contact pads arranged on a bottom surface of the card body portion at almost the same horizontal positions as the contact pads of the first card, the card connector **characterized by** comprising:

a pair of guide grooves formed in both side

walls of the connector housing to support the side edges of the upper body portion of the first card and the side edges of the card body portion of the second card and thereby guide the first or second card as it is inserted or extracted; and

side walls to define, below a space between the pair of the guide grooves, a space in which to accommodate the lower body portion of the first card.

2. A card connector according to claim 1, **characterized in that** said side walls are formed at such locations that they can guide the side surfaces of the lower body portion of the first card.

3. A card connector according to claim 1, further **characterized by** comprising:

an eject mechanism to eject the card; and an elastic braking piece arranged at such a position that it engages the bottom surface of the upper body portion of the first card when the first card is inserted and engages the bottom surface of the card body portion of the second card when the second card is inserted, the braking piece applying a braking force to the first or second card when it is ejected.

4. A card connector according to claim 3, **characterized in that** said elastic braking piece is secured to a position which is in a far part of said guide groove and which is a predetermined distance lower than a lower wall of said guide groove.

5. A card connector according to claim 1, **characterized in that** a housing top plate that forms upper walls of said guide grooves is formed with an opening having a width larger than that of the lower body portion of said first card.

6. A card connector according to claim 1, **characterized in that** a housing top plate that forms upper walls of said guide grooves is formed with a recess having a width larger than that of the lower body portion of said first card and receding in the height direction.

7. A card connector according to claim 1, further **characterized by** comprising:

an elastic braking piece arranged at such a position that it engages the bottom surface of the upper body portion of said first card when said first card is inserted and engages the bottom surface of the card body portion of said second card when said second card is inserted, the braking piece applying a braking force to said first or second card in a card extraction direction.

8. A card connector according to claim 7, **characterized in that** said elastic braking piece is secured to a position which is in a far part of said guide groove and which is a predetermined distance lower than a lower wall of said guide groove. 5
9. A card connector according to claim 7, **characterized in that** a housing top plate that forms upper walls of the guide grooves is formed with an opening having a width larger than that of the lower body portion of the first card. 10
10. A card connector according to claim 7, **characterized in that** a housing top plate that forms upper walls of said guide grooves is formed with a recess having a width larger than that of the lower body portion of said first card and receding in the height direction. 15
- 20
- 25
- 30
- 35
- 40
- 45
- 50
- 55

THIS PAGE BLANK (USPTO)

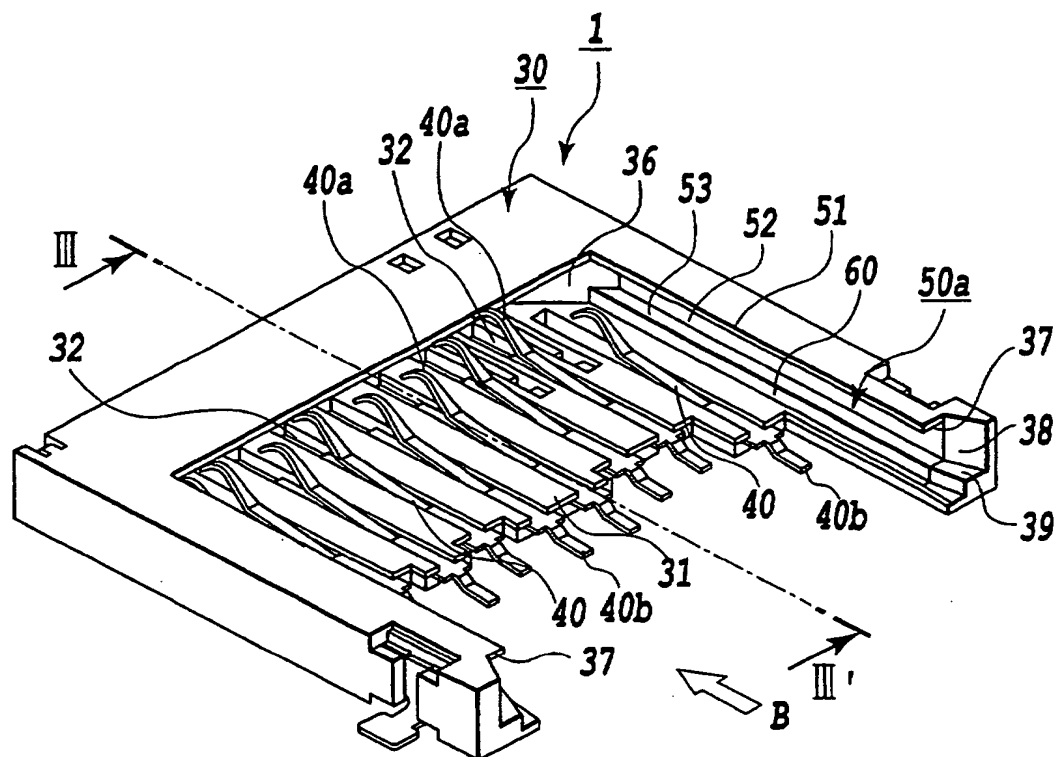


FIG.1

THIS PAGE BLANK (USPTO)

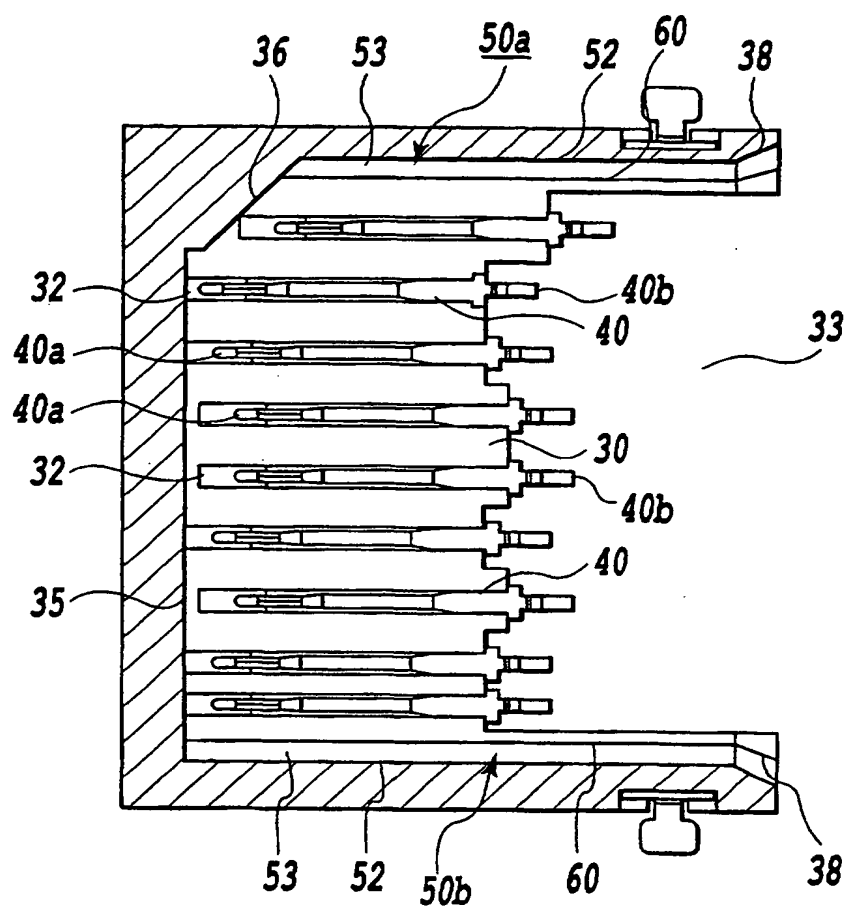


FIG.2

THIS PAGE BLANK (USPTO)

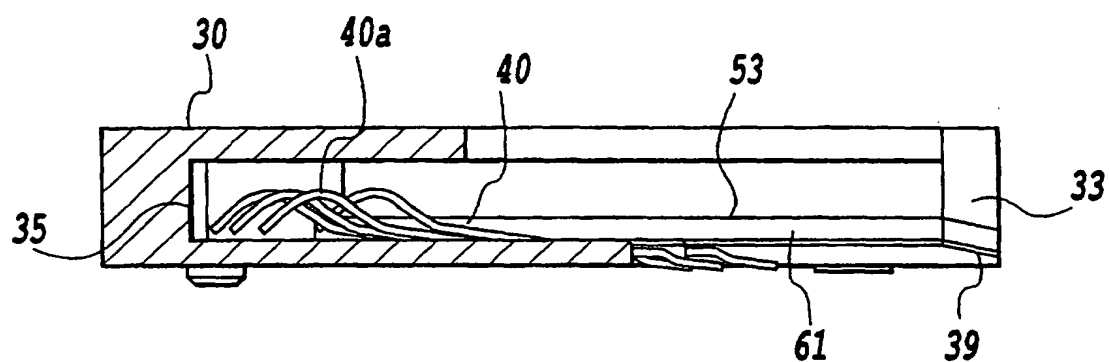


FIG.3

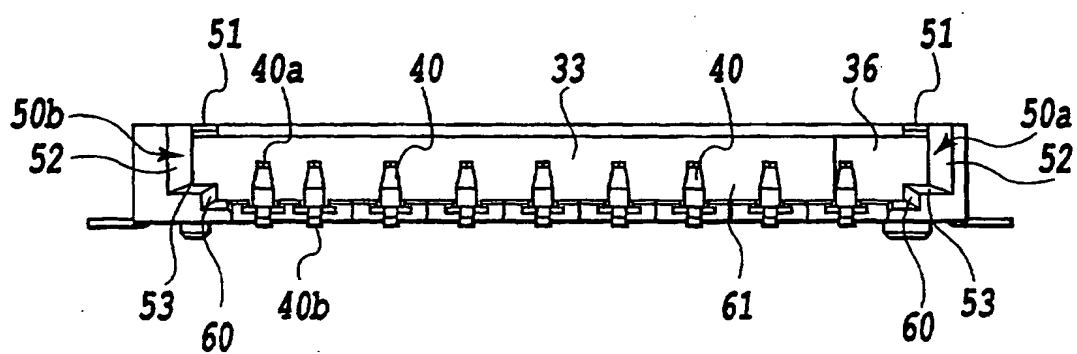


FIG.4

THIS PAGE BLANK (USPTO)

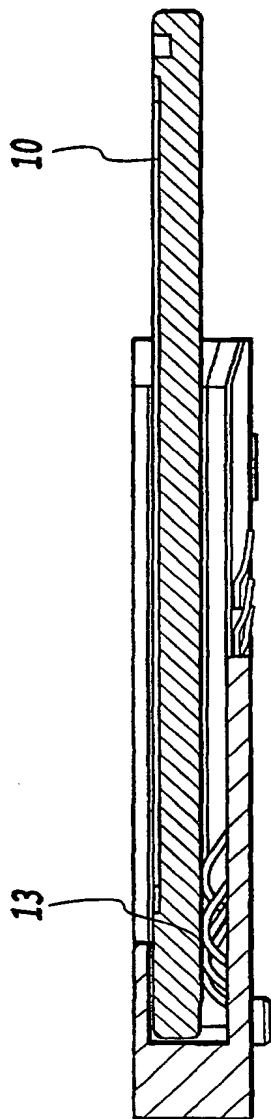


FIG.5

THIS PAGE BLANK (USPTO)

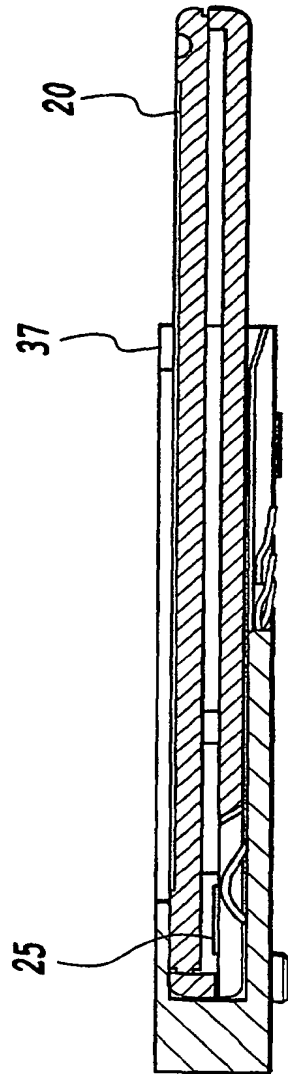


FIG.6

THIS PAGE BLANK (USPTO)

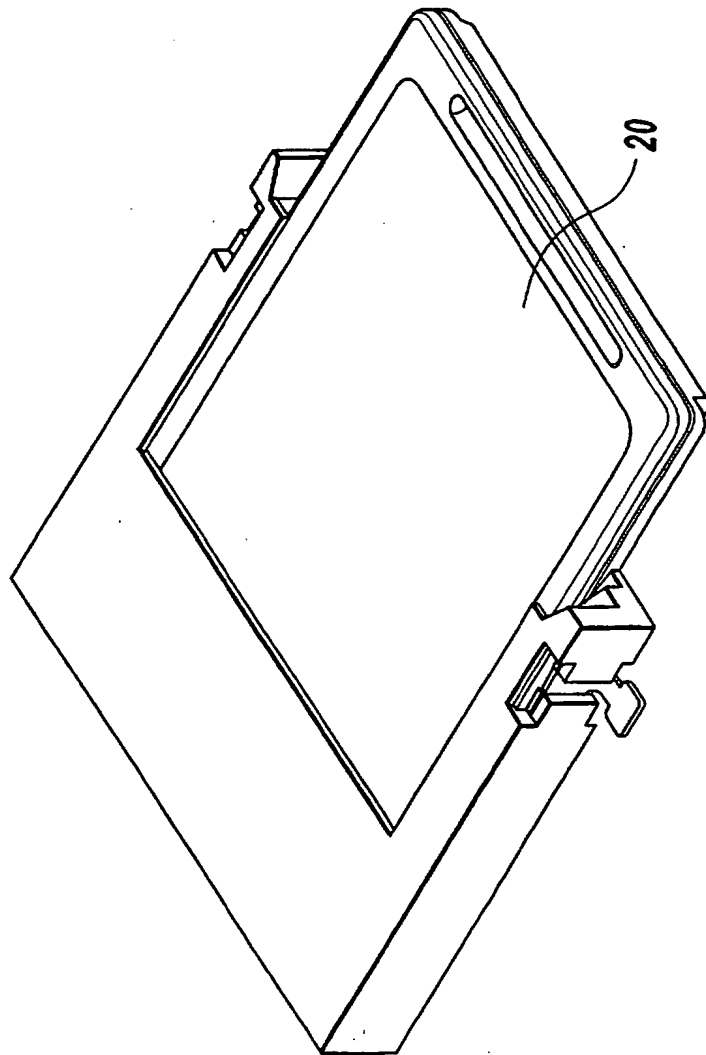


FIG. 7

THIS PAGE BLANK (USPTO)

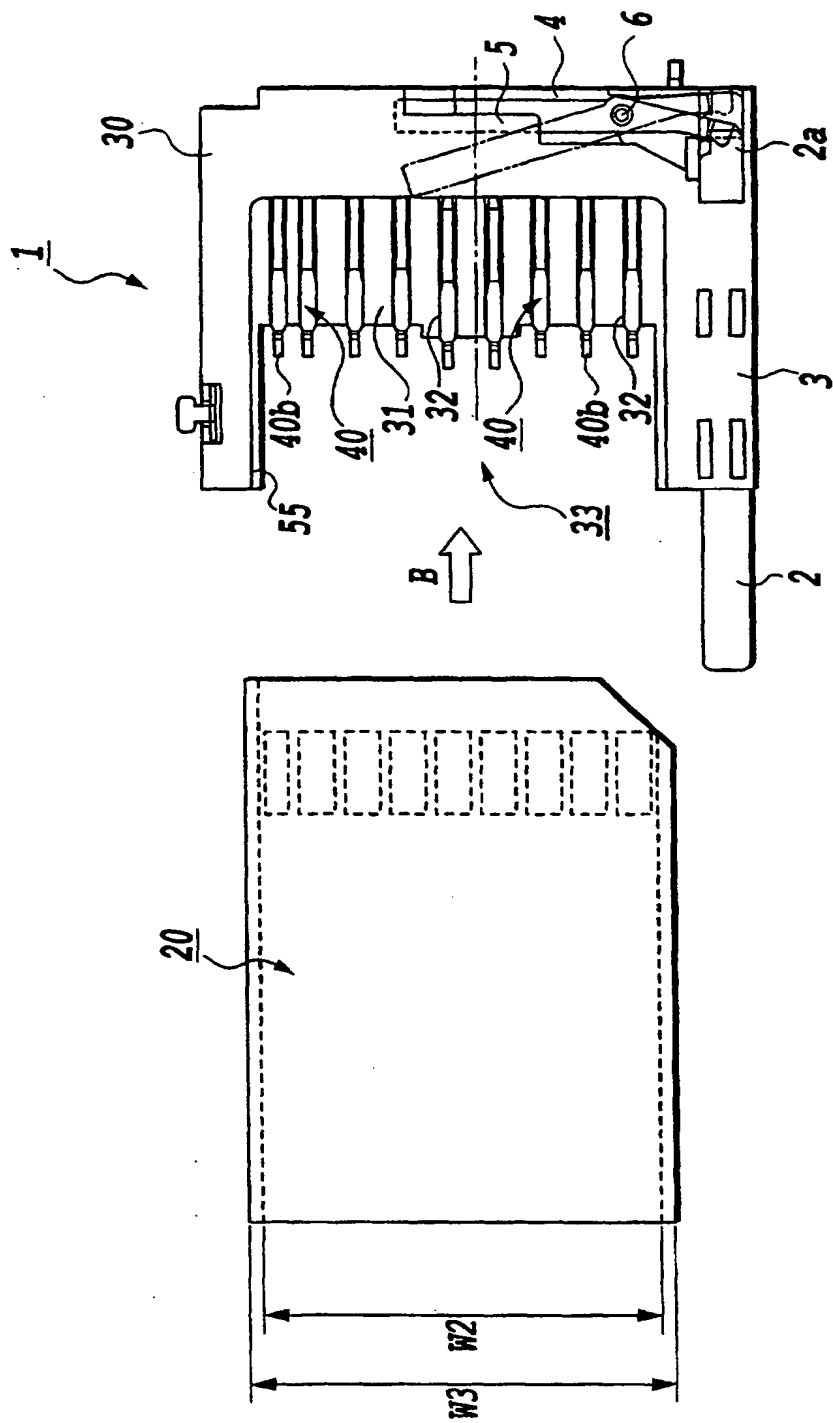


FIG. 8

THIS PAGE BLANK (USPTO)

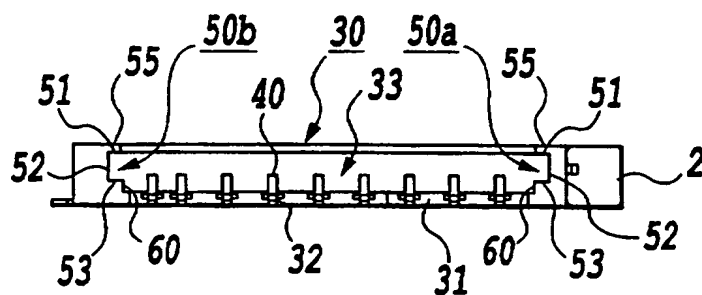


FIG. 9

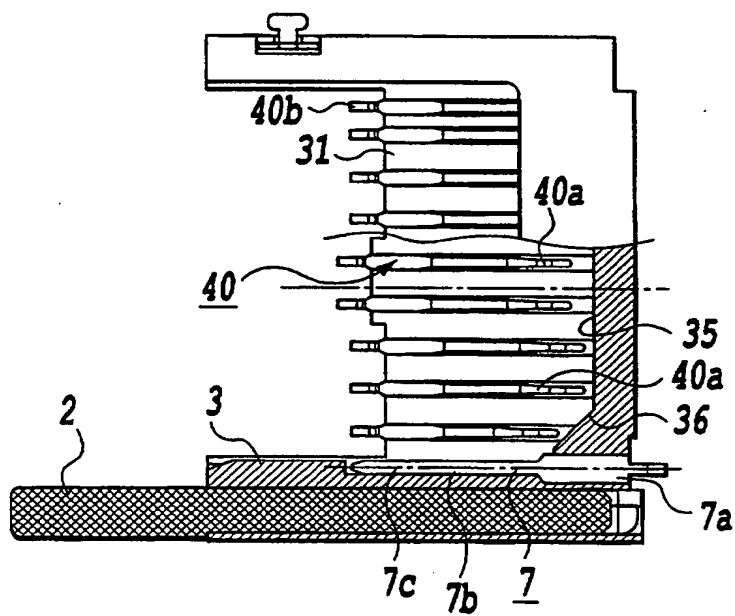


FIG. 10

THIS PAGE BLANK (USPTO)

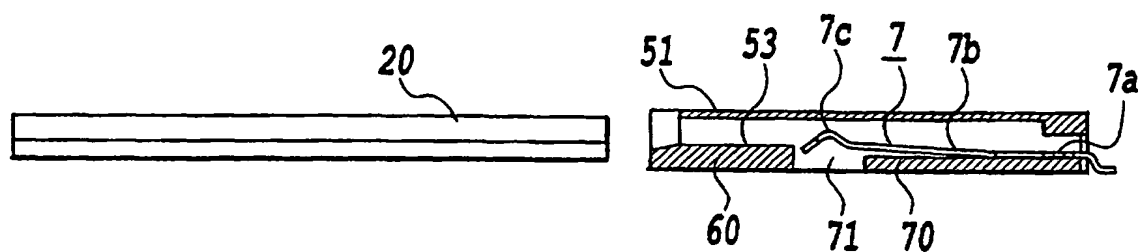


FIG.11

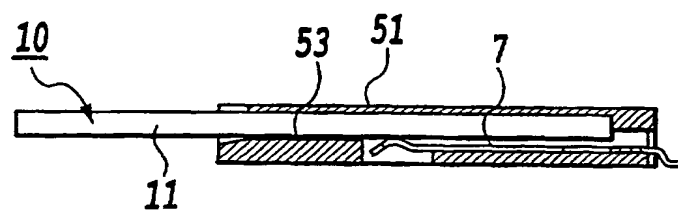


FIG.12

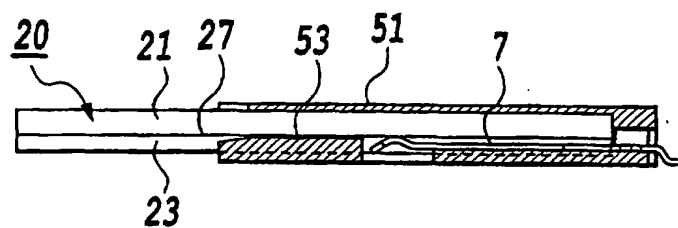


FIG.13

THIS PAGE BLANK (USPTO)

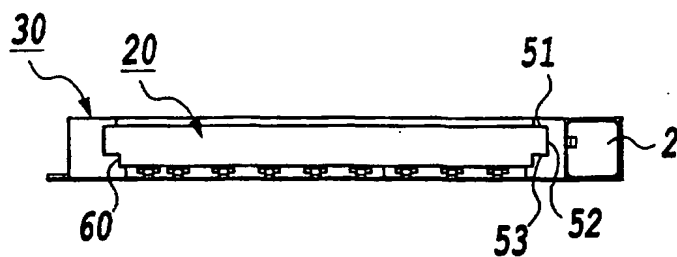


FIG. 14

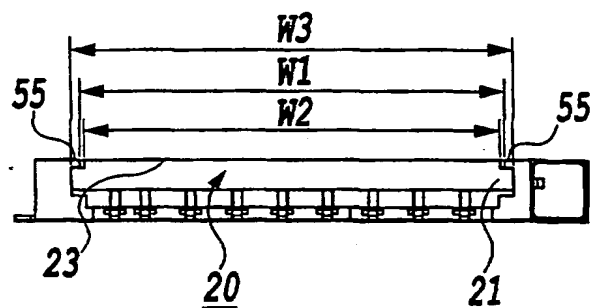


FIG. 15A

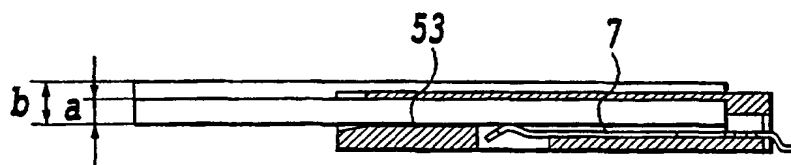


FIG. 15B

THIS PAGE BLANK (USPTO)

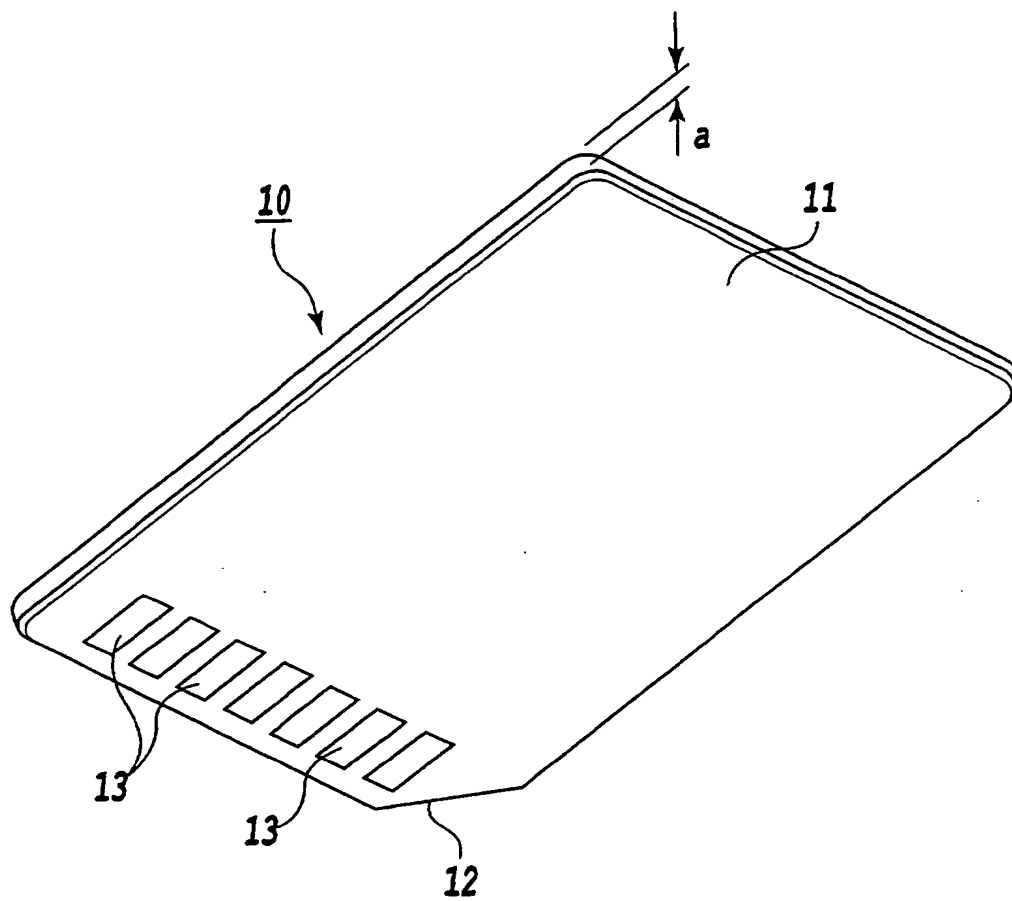


FIG.16

THIS PAGE BLANK (USPTO)

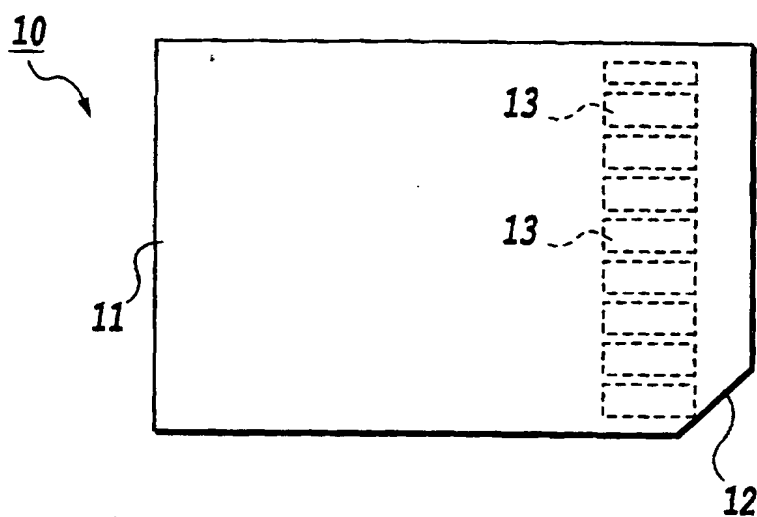


FIG.17A

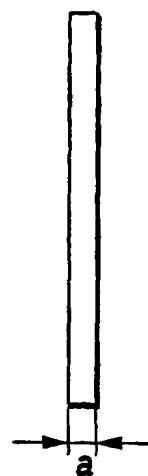


FIG.17B

THIS PAGE BLANK (USPTO)

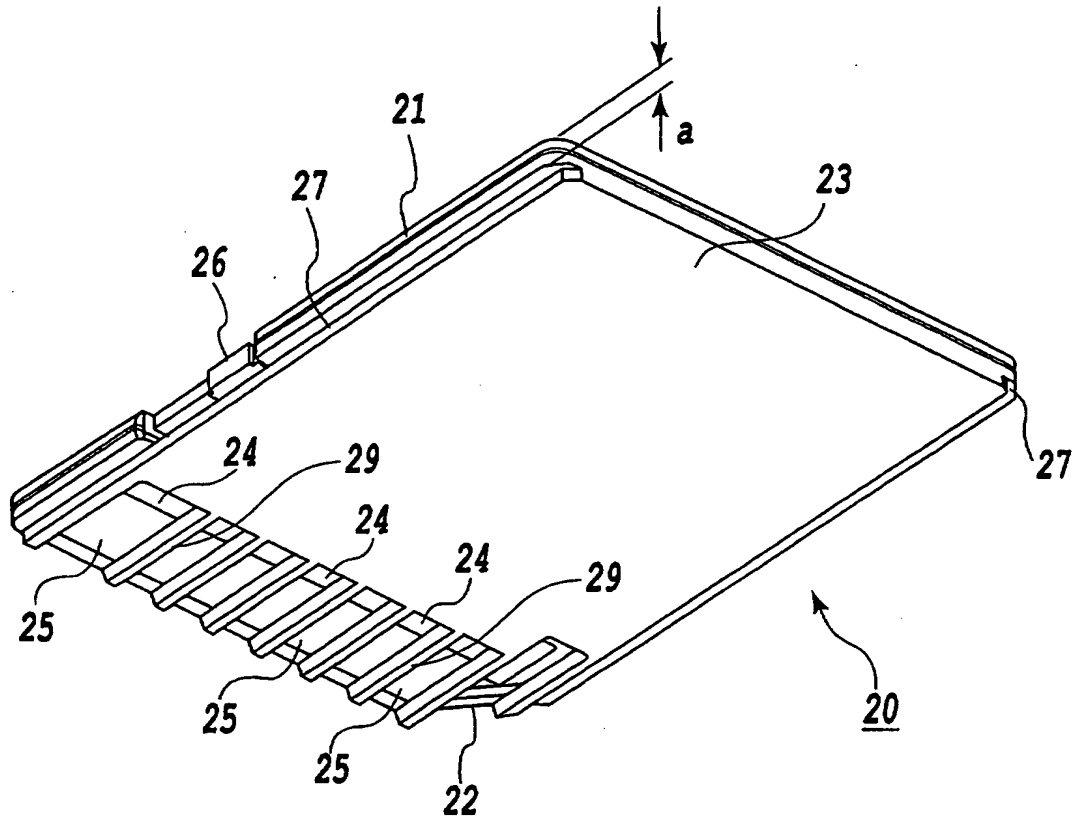


FIG.18

THIS PAGE BLANK (USPTO)

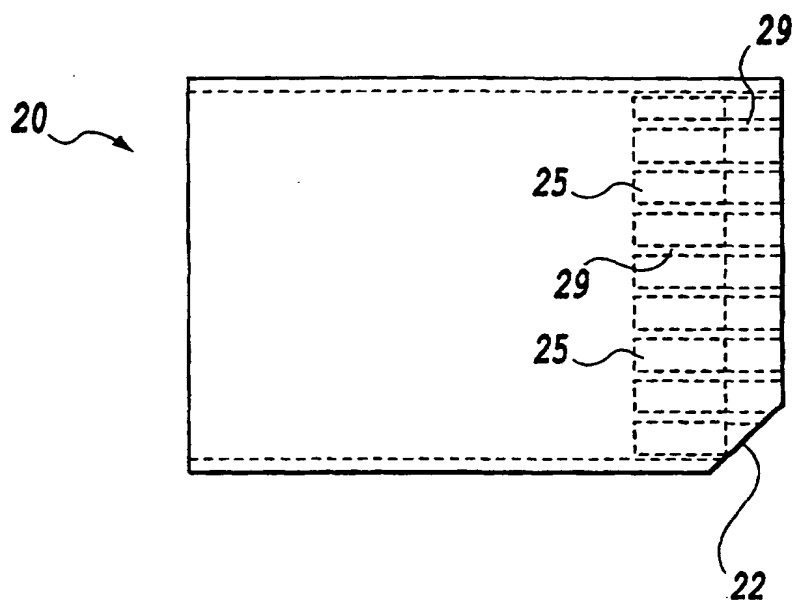


FIG. 19A

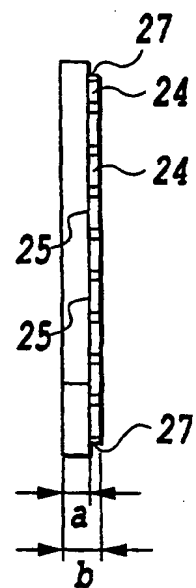


FIG. 19B

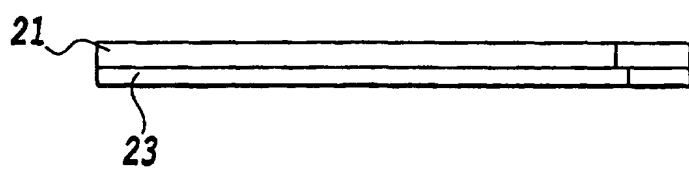


FIG. 19C

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP00/07762

A. CLASSIFICATION OF SUBJECT MATTER Int.Cl ⁷ G06K17/00, H01R13/629, H01R24/12		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) Int.Cl ⁷ G06K17/00, H01R13/629-13/639, H01R24/12		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1926-1996 Jitsuyo Shinan Toroku Koho 1996-2001 Kokai Jitsuyo Shinan Koho 1971-2001 Toroku Jitsuyo Shinan Koho 1994-2001		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP, 6-44052, U (SMK Corporation), 10 June, 1964 (10.06.64) (Family: none)	1-10
A	JP, 8-315081, A (Amphenol-Tuchel Electronics GmbH), 29 November, 1996 (29.11.96) & EP, 742529, A & DE, 19516987, A & US, 5872353, A	1-10
A	JP, 2-187887, A (SOCIETE D'APPLICATIONS GENERALES D'ELECTRICITE ET DE MECANIQUE SAGEM), 24 July, 1990 (24.07.90) & GB, 8925223, A & CA, 2002181, A & FR, 2638876, A & ES, 2017434, A & US, 5198645, A	1-10
A	JP, 11-53503, A (Sony Corporation), 26 February, 1999 (26.02.99) (Family: none)	1-10
A	JP, 5-502746, A (Amphenol-Tuchel Electronics GmbH), 13 May, 1993 (13.05.93) & WO, 9104548, A & DE, 3931508, A	3,4,7-10
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 29 January, 2001 (29.01.01)		Date of mailing of the international search report 06 February, 2001 (06.02.01)
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer
Facsimile No.		Telephone No.

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP00/07762

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP, 6-162281, A (Mitsubishi Plastics, Inc.), 10 June, 1994 (10.06.94) (Family: none)	3, 4, 7-10

Form PCT/ISA/210 (continuation of second sheet) (July 1992)